

LED STREET LIGHT


****<<ECO SERIES>>****

APPLICATION

- Ideal for Parking Areas, Stadiums, Pathway, Garden, Commercial and All Residential Area.

FEATURES

- High Brightness and Long Life LED Chips. (30,000Hrs)
- Operating Temperature -20°C ~ 50°C.
- Solid Aluminium Die-Casting Housing.
- Polycarbonate Material Diffuser.

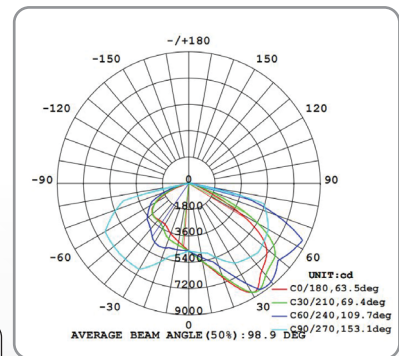

PHOTOMETRY

MODEL	POWER (W)	CCT (K)	LUMEN (LM)	SIZE L x W x H (MM)	MOUNTING TYPE ADJUSTMENT	POLE/ARM DIAMETER Ø (MM)	INSTALLATION HEIGHT (M)	NET WEIGHT (KG)	PACKING (/CTN)
BSSL-1100-1/ECO	100W	3000/5000	12000	567 x 179 x 99	Post Top & Side Entry	45~60	5~7	1.4	2
BSSL-1150-1/ECO	150W	3000/5000	18000	633 x 203 x 99		45~60	7~9	1.9	2
BSSL-1200-1/ECO	200W	3000/5000	24000	624 x 234 x 92	Side Entry	45~60	9~11	2.1	2

