




WOOD/PLASTIC CEILING DIFFUSED WITH HINGED FRAME FITTING



APPLICATION

- Mainly Used for General Lighting in Office, Technical Workshop, Food Industry Laboratories

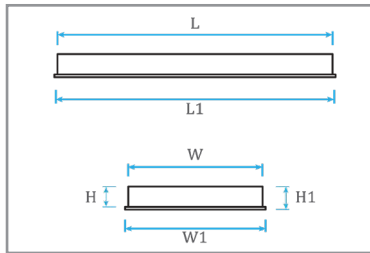

FEATURES

TYPE	Wood/Plaster Ceiling Diffused Fitting With Hinged Frame
MODEL/CODE	BMR/HF (Wood Ceiling Hinged Frame)
BODY	High Quality Gauge Sheet Steel
PAINT WORK	Fully Couated With Epoxy Powder Coated Finished
MOUNTING	Recessed Hinged Frame Type
LIGHT SOURCE	Fluorescent TLD Lamp and T8 LED Tube
LAMP HOLDER & STARTERHOLDER	Polycarbonate Material
COMPONENT	Conventional or Electronic Ballast, EL Emergency Power Pack , Fused Terminal Block

MODEL	DESCRIPTION	L (mm)	L1 (mm)	W (mm)	W1 (mm)	H (mm)	H1 (mm)
BMR/HF 220 (1' x 2')	2 TUBE (1 x 2 feet)	615	635	295	335	78	87
BMR/HF 220	2 TUBE (2 x 2 feet)	615	635	600	640	78	87
BMR/HF 320	3 TUBE (2 x 2 feet)	615	635	600	640	78	87
BMR/HF 420	4 TUBE (2 x 2 feet)	615	635	600	640	78	87
BMR/HF 240 (1' x 4')	2 TUBE (1 x 4 feet)	1222	1245	295	335	78	87
BMR/HF240	2 TUBE (2 x 4 feet)	1222	1245	600	640	78	87
BMR/HF 340	3 TUBE (2 x 4 feet)	1222	1245	600	640	78	87
BMR/HF 440	4 TUBE (2 x 4 feet)	1222	1245	600	640	78	87