

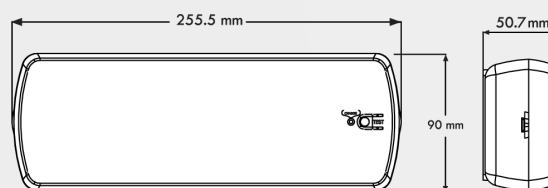




SURFACE BOX UP LED EMERGENCY LIGHT (BEL 338)

MODEL	BEL338
MODE OF OPERATION	Non-Maintained
INPUT VOLTAGE	240V $\pm$ 10%, 50Hz
POWER CONSUMPTION	<2.0W
BATTERY TYPE	3.2V , 1500mAh Lithium ion Battery
LAMP USED	6 x 0.5W SMD LED
LUMINOSITY OUTPUT	95 Lumens
CHARGES	Constant Current
INDICATION	Red LED "On" Indicates Charging Equipped with Push Test-Switch to Simulate Power Failure
BACKUP DURATION	3 Hours
OPERATION TEMPERATURE	35°C
CONSTRUCTION	Thermoplastic in White ABS Polyester Base Polycarbonate Diffuser
CLASSIFICATION	Class II
MOUNTING TYPE	Surface or Recessed (Add ON Optional Recessed Frame Bracket)
CERTIFIED COMPLIANCE	MS 619-2-22:2005 MS IEC 60598-1:2012 BOMBA APPROVED
CERTIFIED BY	SIRIM QAS International Sdn. Bhd Jabatan Bomba dan Penyelamat Malaysia
WARRANTY	5 years warrantly (Component) 1 year warranty (Battery)
DIMENSION	255.5(L)mm x 90(W)mm x 50.7(H)mm
WEIGHT	0.32kg
QUANTITY	20/CTN
OUTER BOX	260(L)mm x 100(W)mm x 60(H)mm
INNER BOX	525(L)mm x 280(W)mm x 260(H)mm

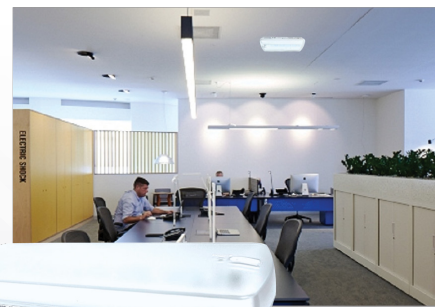

Please charge the battery for more than 12 hours before first discharge.

Note: Due to continuous development and improvement our company reserve the right to change specification without notice

