




BOX UP KELUAR SIGN (TR 408)



MODEL	TR408
MODE OF OPERATION	Maintained
INPUT VOLTAGE	240V $\pm$ 10%, 50Hz
POWER CONSUMPTION	<5VA
BATTERY TYPE	3.6V 900mAh Ni-Cd Battery
LAMP-MAINS "ON"	16 x 0.2W SMD LED
LAMP-MAIN "OFF"	16 x 0.2W SMD LED
RATED DURATION	3 Hours
CHARGER	Solid State Electronic Automatic
CHARGING MONITOR	Red LED 5mm Diameter
TEST FACILITY	Independent Testing
OPERATION TEMPERATURE	35°C
SAFETY FEATURE	Low Voltage Cut-off to Prevent Over Discharge of the Battery
FITTING CONSTRUCTION	Metal Casing Finish In Epoxy Powder Coating
DIFFUSER	Acrylic Diffuser
MOUNTING TYPE	Wall Mounting
CERTIFIED COMPLIANCE	MS 983:2004 MS 619-2-22 : 2012 MS IEC 60598-1:2012 BOMBA APPROVED
WARRANTY	1 year from the Date of Delivery
DIMENSION	570(L)mm x 155(W)mm x 56(H)mm
WEIGHT	1.02kg
QUANTITY	6/CTN
OUTER BOX	592(L)mm x 405(W)mm x 192(H)mm
INNER BOX	580(L)mm x 165(W)mm x 65(H)mm

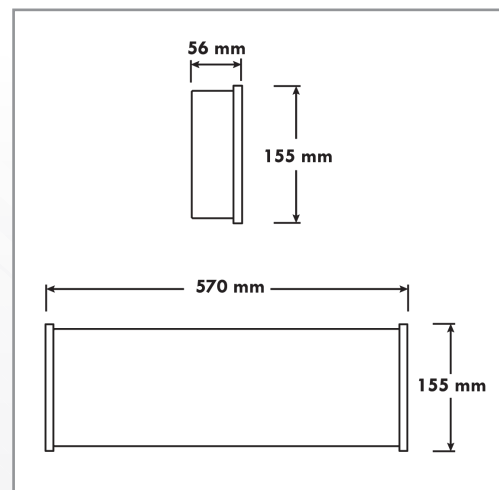

Please charge the battery for more than 12 hours before first discharge.

- Quality Assured by Full SIRIM Licence in Malaysia since 1992.
- Approved by Director General of Fire Service in Malaysia.
- Approved by Standard & Industrial Research Institute of Malaysia (SIRIM).
- Approved by Chief Electrical Inspector of Malaysia.
- Complies Fully with Uniform Building By-Law Regulations in Malaysia.

Note: Due to continuous development and improvement our company reserve the right to change specification without notice

