





BOX UP KELUAR SIGN (BKR330)



FEATURES

MODEL	BKR330
MODE OF OPERATION	Maintained
INPUT VOLTAGE	240V~50Hz/PF0.40/0.049A
POWER CONSUMPTION	4.7W
LED TYPE	13 x 0.5W
BATTERY TYPE	LiFePO4 Battery 3.2V, 1.8Ah
CHARGING TYPE	Automatic Battery Charging System
RECHARGE TIME	19~24 Hours
INDICATOR LIGHT	Red Light Indicator Charging & PUSH-TEST BUTTON for Funtional Test
BACKUP DURATION	>3 Hours
OPERATION TEMPERATURE	35°C
INGRESS PROTECTION	IP20
LUMINAIRE CLASSIFICATION	Class A-E
SAFETY CLASSIFICATION	Class II
MATERIAL	Housing : Acrylonitrile Butadiene Styrene (ABS) Diffuser : Polystyrene (PS)
MOUNTING TYPE	Surface Mounting
CERTIFIED COMPLIANCE	MS 2687:2018 MS 619-2-22:2005 MS IEC 60598-1:2012 BOMBA APPROVED
CERTIFIED BY	SIRIM QAS INTERNATIONAL JABATAN BOMBA & PENYELAMAT MALAYSIA
DIMENSION	563(L)mm x 168(W)mm x 33(H)mm
WEIGHT	0.8kg
QUANTITY	10/CTN
WARRANTY	5 Years for Component 1 Year for Battery

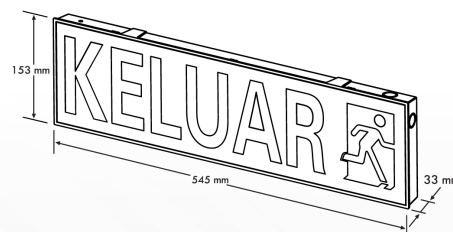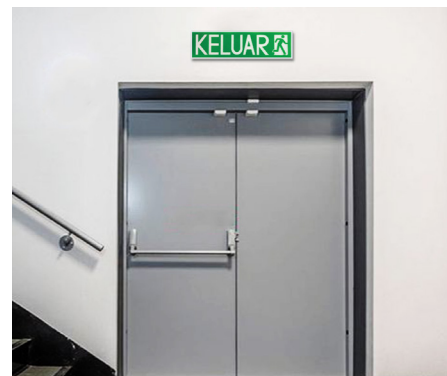

PICTOGRAM	SINGLE SIDED
	BKR330 (KM)
	BKR330 (KR)
	BKR330 (KL)
	BKR330 (UA)
	BKR330 (LRA)



Please charge the battery for more than 12 hours before first discharge.

Note: Due to continuous development and improvement our company reserve the right to change specification without notice

