




RECESSED BOX UP LED EMERGENCY LIGHT (TRE208L/R)



MODEL	TRE208L
MODE OF OPERATION	Non-Maintained
INPUT VOLTAGE	240V $\pm$ 10%, 50Hz
POWER CONSUMPTION	4VA
BATTERY TYPE	3.6V 900 mAh Ni-Cd Battery
LAMP USED	12 x 0.2W SMD LED
BRIGHTNESS OUTPUT	120 Lux
LUMINOSITY OUTPUT	64 lm
RATED DURATION	3 Hours
TEST FACILITY	Independent Testing
CHARGING MONITOR	Red LED 5mm Diameter
FITTING CONSTRUCTION	Metal Casing Finish in Epoxy Powder Coating
BATTERY CHARGER	Solid State Electronic Automatic
SAFETY FEATURE	Low Voltage Cut-off to Prevent Over Discharge of the Battery, Incoming AC Fuse
DIFFUSER	Prismatic Acrylic Diffuser
MOUNTING TYPE	Wall or Ceiling Mounting
CERTIFIED COMPLIANCE	MS 619-2-22 : 2012 MS IEC 60598-1:2012 BOMBA APPROVED
WARRANTY	1 year from the Date of Delivery
DIMENSION	399(L)mm x 188(W)mm x 100(H)mm
WEIGHT	1.4kg
QUANTITY	6/CTN
OUTER BOX	425(L)mm x 340(W)mm x 405(H)mm
INNER BOX	405(L)mm x 93(W)mm x 107(H)mm

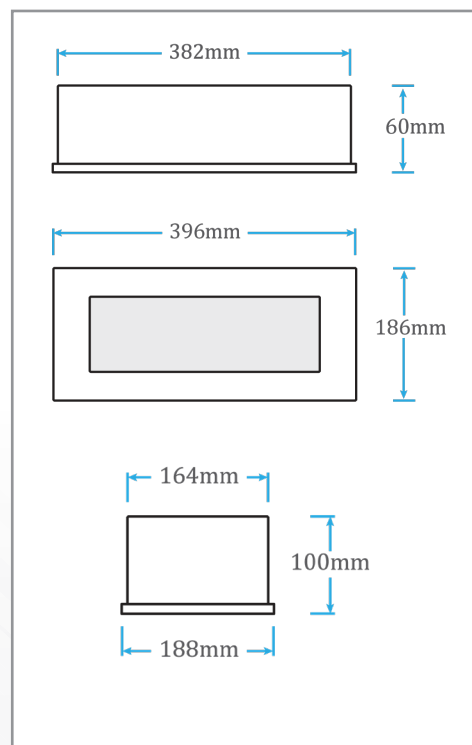

Please charge the battery for more than 12 hours before first discharge.

- Quality Assured by Full SIRIM Licence in Malaysia since 1992.
- Approved by Director General of Fire Service in Malaysia.
- Approved by Standard & Industrial Research Institute of Malaysia (SIRIM).
- Approved by Chief Electrical Inspector of Malaysia.
- Complies Fully with Uniform Building By-Law Regulations in Malaysia.

Note: Due to continuous development and improvement our company reserve the right to change specification without notice

