




RECESSED HIGH POWER LED EMERGENCY LIGHT (TRE 118 LED)



MODEL	TRE 118 LED
MODE OF OPERATION	Non-Maintained
INPUT VOLTAGE	40V $\pm$ 10%, 50Hz
BATTERY TYPE	3.6V 900 mAh Ni-Cd Battery
LAMP USED	1 x 1.0W High Power
INDICATOR	Red LED 5mm Diameter
LUMINOSITY OUTPUT	44 lm
RATED DURATION	3 Hours
TEST FACILITY	Micro Switch For Independent Testing
OPERATION TEMPERATURE	25°C
FITTING CONSTRUCTION	Metal Casing Finish in Epoxy Powder Coating
BATTERY CHARGER	High Temp. Sealed Nickel Cadmium (Ni-Cd)
MOUNTING TYPE	Recess Mounting (80mm Round Hole)
CERTIFIED COMPLIANCE	MS 619-2-22 : 2012 MS IEC 60598-1:2012 BOMBA APPROVED
WARRANTY	1 year from the Date of Delivery
DIMENSION	Power Pack (Cylinder)-85mm Height x 75mm Disk - 95mm Diameter
WEIGHT	320g
QUANTITY	40/CTN
OUTER BOX	570(L)mm x 238(W)mm x 405(H)mm
INNER BOX	110(L)mm x 110(W)mm x 95(H)mm

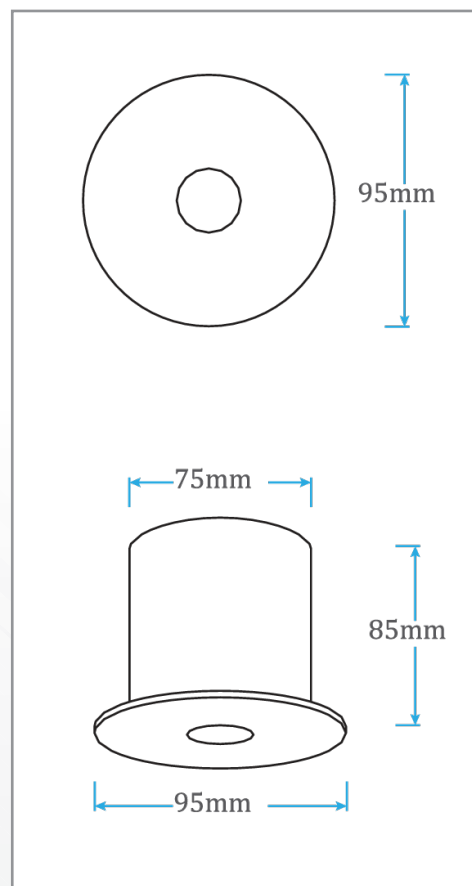

Please charge the battery for more than 12 hours before first discharge.

EMERGENCY LIGHT 9-12
/ KELLUAR SIGN

- Quality Assured by Full SIRIM Licence in Malaysia since 1992.
- Approved by Director General of Fire Service in Malaysia.
- Approved by Standard & Industrial Research Institute of Malaysia (SIRIM).
- Approved by Chief Electrical Inspector of Malaysia.
- Complies Fully with Uniform Building By-Law Regulations in Malaysia.

Note: Due to continuous development and improvement our company reserve the right to change specification without notice

