






TWIN LAMP EMERGENCY LIGHT (TRE 66 LED)

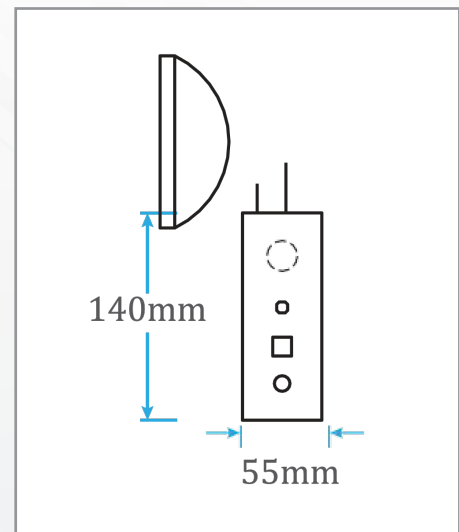

MODEL	TRE 66 LED
MODE OF OPERATION	Non-Maintained
INPUT VOLTAGE	240V $\pm$ 10%, 50Hz
BRIGHTNESS OUTPUT	147Lux
LUMINOSITY OUTPUT	177lm
TEST FACILITY	Independent Testing
LAMP USED	2 x 18 x 0.06W Super Bright + SMD LED
POWER CONSUMPTION	0.1A
RATED DURATION	3 Hours
OPERATION TEMPERATURE	25°C
BATTERY TYPE	Solid State Elektronik Automatic
BATTERY CHARGER	H4.8V 1800mAh Ni-CD Battery
INDICATOR	Red LED 5mm Diameter
FITTING CONSTRUCTION	Metal Casing Finish in Epoxy Powder Coating
MOUNTING TYPE	Wall Mounting
SAFETY FEATURE	Low Voltage Cut-off to Prevent Over Discharge of the Battery, Incoming AC Fuse
CERTIFIED COMPLIANCE	MS 983:2004 MS 619-2-22:2005 MS IEC 60598-1:2012
WARRANTY	1 Year from the Date of Delivery
DIMENSION	270(L)mm x 55(W)mm x 142(W)mm
WEIGHT	1.08kg
QUANTITY	5/CTN
OUTER BOX	470(L)mm x 320(W)mm x 342(H)mm
INNER BOX	320(L)mm x 91(W)mm x 290(H)mm

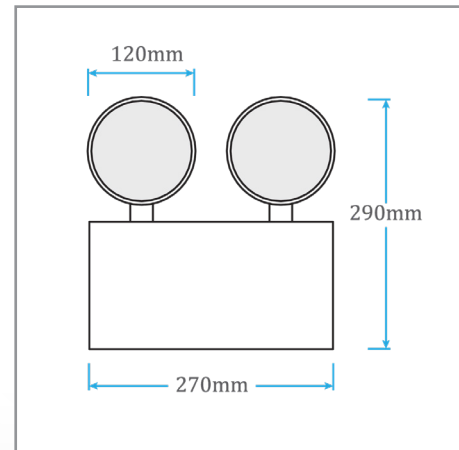

Please charge the battery for more than 12 hours before first discharge.

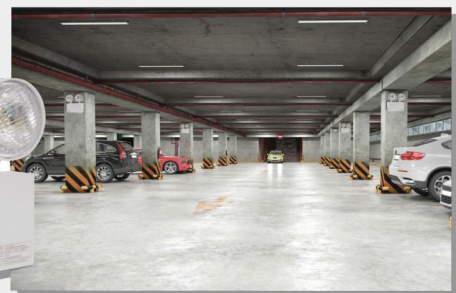

EMERGENCY LIGHT 9-13
/ KELLUAR SIGN

- Quality Assured by Full SIRIM Licence in Malaysia since 1992.
- Approved by Director General of Fire Service in Malaysia.
- Approved by Standard & Industrial Research Institute of Malaysia (SIRIM).
- Approved by Chief Electrical Inspector of Malaysia.
- Complies Fully with Uniform Building By-Law Regulations in Malaysia.

Note: Due to continuous development and improvement our company reserve the right to change specification without notice

