



SURFACE BOX UP LED EMERGENCY LIGHT (BEL338)




FEATURES

MODEL	BEL338
MODE OF OPERATION	Non-Maintained
INPUT VOLTAGE	240V~50Hz/PF0.35/0.024A
POWER CONSUMPTION	2.0W
LED TYPE	6 x 0.5W
BATTERY TYPE	LiFePO4 Battery 3.2V, 1.5Ah
CHARGING TYPE	Automatic Battery Charging System
RECHARGE TIME	19~24 Hours
INDICATOR LIGHT	Red Light Indicator Charging & PUSH-TEST BUTTON for Funtional Test
BACKUP DURATION	>3 Hours
OPERATION TEMPERATURE	35°C
INGRESS PROTECTION	IP20
LUMINOUS OUTPUT	95lm
LUMINAIRE CLASSIFICATION	Class D
SAFETY CLASSIFICATION	Class II
MATERIAL	Housing : Acrylonitrile Butadiene Styrene (ABS) Diffuser : Polycarbonate (PC)
MOUNTING TYPE	Surface Mounting
CERTIFIED COMPLIANCE	MS 2687:2018 MS 619-2-22:2005 MS IEC 60598-1:2021 BOMBA APPROVED
CERTIFIED BY	SIRIM QAS INTERNATIONAL JABATAN BOMBA & PENYELAMAT MALAYSIA
DIMENSION	255.5(L)mm x 90(W)mm x 50.7(H)mm
WEIGHT	0.3kg
QUANTITY	20/CTN
WARRANTY	5 Years for Component 1 Year for Battery



Please charge the battery for more than 12 hours before first discharge.

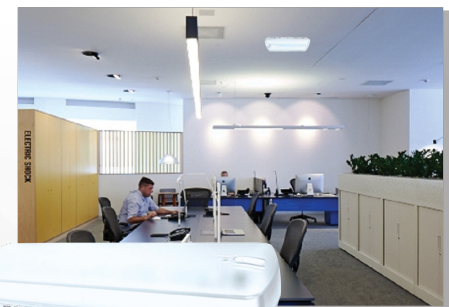

* Recessed Frame is Optional

