


RECESSED HIGH POWER EMERGENCY LIGHT (BEL228)

FEATURES

MODEL	BEL228
MODE OF OPERATION	Non-Maintained
INPUT VOLTAGE	240V~50Hz/PF0.65/0.014A
POWER CONSUMPTION	2.3W
LED TYPE	1 x 2W
BATTERY TYPE	LiFePO4 Battery 3.2V, 1.8Ah (Easy to Repair)
CHARGING TYPE	Automatic Battery Charging System
RECHARGE TIME	19~24 Hours
INDICATOR LIGHT	Red Light Indicator Charging & PUSH-TEST BUTTON for Funtional Test
BACKUP DURATION	>3 Hours
OPERATION TEMPERATURE	35°C
INGRESS PROTECTION	IP20
LUMINOUS OUTPUT	145lm
LUMINAIRE CLASSIFICATION	Class D
SAFETY CLASSIFICATION	Class II
MATERIAL	Housing : Polycarbonate (PC) Diffuser : Polycarbonate (PC)
MOUNTING TYPE	Recessed Mounting
CERTIFIED COMPLIANCE	MS 2687:2018 MS 619-2-22:2005 MS IEC 60598-1:2021 BOMBA APPROVED
CERTIFIED BY	SIRIM QAS INTERNATIONAL JABATAN BOMBA & PENYELAMAT MALAYSIA
DIMENSION	95(Ø)mm x 60(H)mm
WEIGHT	0.6kg
QUANTITY	20/CTN
WARRANTY	5 Years warranty (Component) 1 Year warranty (Battery)

- !** Please charge the battery for more than 12 hours before first discharge.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person

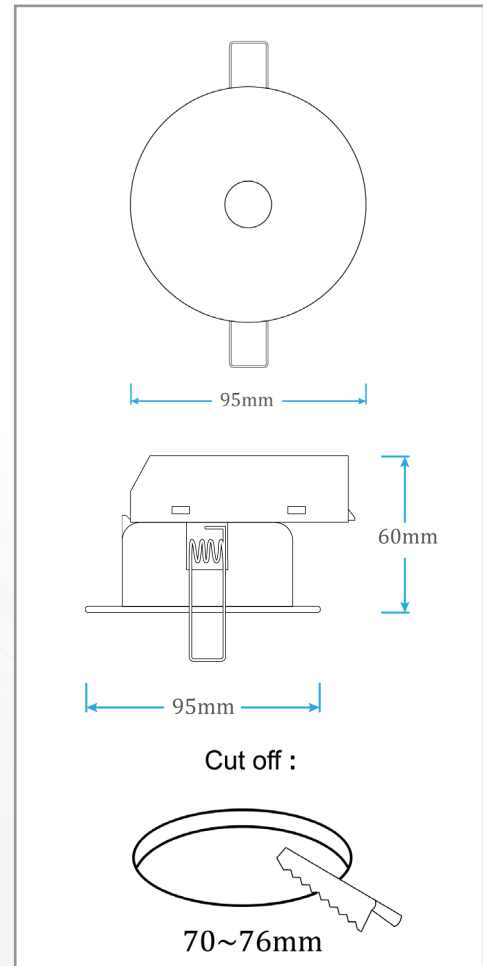

Available to add on Surface Frame
150(Ø)mm x 62(H)mm

Note: Due to continuous development and improvement our company reserve the right to change specification without notice

