





TWIN LAMP LED EMERGENCY LIGHT (BEL66P)



FEATURES

MODEL	BEL66P
MODE OF OPERATION	Non-Maintained
INPUT VOLTAGE	240V~50Hz/PF0.6/0.019A
POWER CONSUMPTION	3.0W
LED TYPE	2 x (6 x 0.2W)
BATTERY TYPE	LiFePO4 Battery 3.2V, 1.8Ah
CHARGING TYPE	Automatic Battery Charging System
RECHARGE TIME	19~24 Hours
INDICATOR LIGHT	Red Light Indicator Charging & PUSH-TEST BUTTON for Funtional Test
BACKUP DURATION	>3 Hours
OPERATION TEMPERATURE	35°C
INGRESS PROTECTION	IP20
LUMINOUS OUTPUT	185lm
LUMINAIRE CLASSIFICATION	Class D
SAFETY CLASSIFICATION	Class II
MATERIAL	Housing : Polycarbonate (PC) Diffuser : Polycarbonate (PC)
MOUNTING TYPE	Surface Mounting
CERTIFIED COMPLIANCE	MS 2687:2018 MS 619-2-22:2005 MS IEC 60598-1:2021 BOMBA APPROVED
CERTIFIED BY	SIRIM QAS INTERNATIONAL JABATAN BOMBA & PENYELAMAT MALAYSIA
DIMENSION	270(L)mm x 78(W)mm x 300(H)mm
WEIGHT	0.8kg
QUANTITY	5/CTN
WARRANTY	5 Years for Component 1 Year for Battery

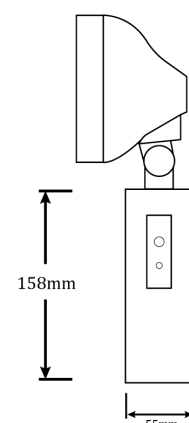

- Please charge the battery for more than 12 hours before first discharge.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person

Note: Due to continuous development and improvement our company reserve the right to change specification without notice

