



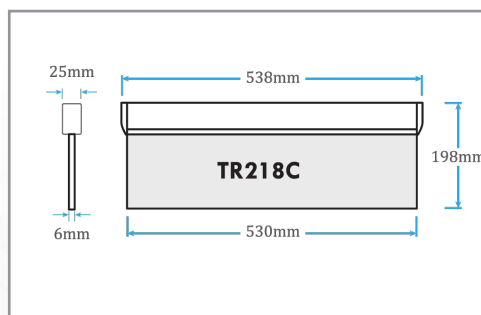

SURFACE EMERGENCY KELUAR SIGN (TR218C)

MODEL	TR218C
MODE OF OPERATION	Maintained
INPUT VOLTAGE	240V $\pm$ 10%, 50Hz
POWER CONSUMPTION	<6.3VA
BATTERY TYPE	Sealed Nickel-Cadmium Battery
LAMP USED	SMD LED
LAMP-MAINS "ON"	16 x 0.2W SMD LED
LAMP-MAIN "OFF"	16 x 0.2W SMD LED
RATED DURATION	>3 Hours
HOUSING	Anodised Aluminium Extrusion
CHARGING MONITOR	Red LED Indicates Battery Charging
PROJECTION RATING	IP20
SAFETY FEATURE	Low Voltage Cut-off to Prevent Over Discharge of the Battery
MOUNTING TYPE	Wall or Ceiling Mounting
CERTIFIED COMPLIANCE	MS 983:2004 MS 619-2-22 : 2012 MS IEC 60598-1:2012 BOMBA APPROVED
WARRANTY	1 year from the Date of Delivery
DIMENSION KELUAR	538(L)mm x 198(W)mm x 125(H)mm
WEIGHT	1.3kg
QUANTITY	10/CTN
OUTER BOX	578(L)mm x 430(W)mm x 245(H)mm
INNER BOX	555(L)mm x 40(W)mm x 235(H)mm

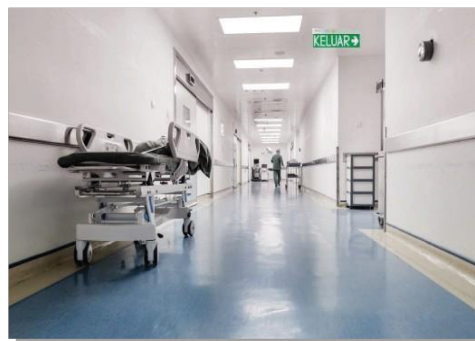

PICTOGRAM	SINGLE SIDED	DOUBLE SIDED
	TR218C (KM)	TR218C/D (KM)
	N/A	TR218C/D (KLR)
	N/A	TR218C/D (KLR)
	TR218C (UA)	TR218C/D (UA)
	N/A	TR218C/D (LRA)

! Please charge the battery for more than 12 hours before first discharge.



EMERGENCY LIGHT 9-8
/KELUAR SIGN

- Quality Assured by Full SIRIM Licence in Malaysia since 1992.
- Approved by Director General of Fire Service in Malaysia.
- Approved by Standard & Industrial Research Institute of Malaysia (SIRIM).
- Approved by Chief Electrical Inspector of Malaysia.
- Complies Fully with Uniform Building By-Law Regulations in Malaysia.

Note: Due to continuous development and improvement our company reserve the right to change specification without notice

