




RECESS EMERGENCY KELUAR SIGN (TR218C/R)



MODEL	TR218C/R
MODE OF OPERATION	Maintained
INPUT VOLTAGE	240V $\pm$ 10%, 50Hz
POWER CONSUMPTION	<6.3VA
BATTERY TYPE	Sealed Nickel-Cadmium Battery
LAMP USED	SMD LED
LAMP-MAINS "ON"	16 x 0.2W SMD LED
LAMP-MAIN "OFF"	16 x 0.2W SMD LED
RATED DURATION	>3 Hours
HOUSING	Metal Casing Finish In Epoxy Powder Coating
CHARGING MONITOR	Red LED Indicates Battery Charging
PROJECTION RATING	IP20
SAFETY FEATURE	Low Voltage Cut-off to Prevent Over Discharge of the Battery
MOUNTING TYPE	Wall or Ceiling Mounting
CERTIFIED COMPLIANCE	MS 983:2004 MS 619-2-22 : 2012 MS IEC 60598-1:2012 BOMBA APPROVED
WARRANTY	1 year from the Date of Delivery
DIMENSION KELUAR KELUAR RECESS	538(L)mm x 198(W)mm x 125(H)mm D1 - 540(L)mm x 40(W)mm x 55(H)mm D2 - 620(L)mm x 82(W)mm
WEIGHT	1.3kg
QUANTITY	5/CTN
OUTER BOX	640(L)mm x 43(W)mm x 22(H)mm
INNER BOX	625(L)mm x 205(W)mm x 82(H)mm

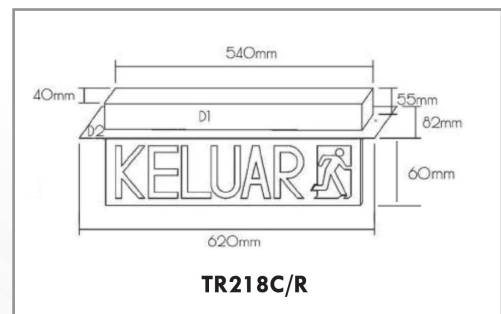

PICTOGRAM	SINGLE SIDED	DOUBLE SIDED
KELUAR	TR218C/R (KM)	TR218C/RD (KM)
KELUAR	N/A	TR218C/RD (KLR)
KELUAR	N/A	TR218C/RD (KLR)
KELUAR	TR218C/R (UA)	TR218C/RD (UA)
KELUAR	N/A	TR218C/RD (LRA)

! Please charge the battery for more than 12 hours before first discharge.



- Quality Assured by Full SIRIM Licence in Malaysia since 1992.
- Approved by Director General of Fire Service in Malaysia.
- Approved by Standard & Industrial Research Institute of Malaysia (SIRIM).
- Approved by Chief Electrical Inspector of Malaysia.
- Complies Fully with Uniform Building By-Law Regulations in Malaysia.

Note: Due to continuous development and improvement our company reserve the right to change specification without notice

