



LED MODULE FLOODLIGHT PHILIPS XITANIUM LED DRIVER

****<<ULTRA SERIES>>****





APPLICATION

- Ideal for Parking Areas, Stadiums, Courtyard, Storefront, Stations, Wharf Bridge, Warehouse, All Commercial and Residential Area.



FEATURES

- High Brightness and Long Life LED Chips (50,000Hrs)
- Operating temperature -20° C ~ 50° C.
- Solid Aluminium Die-Casting Housing and Polycarbonate Material Diffuser.
- Efficiency : 150lm/W
- Heat Dissipation Performance.
- Free Combination : 200W capable upgrade until 1000W
- Aluminium Bracket, Anti-Corrosion Rustproof.
- Heavy Duty and High Energy Efficiency Design

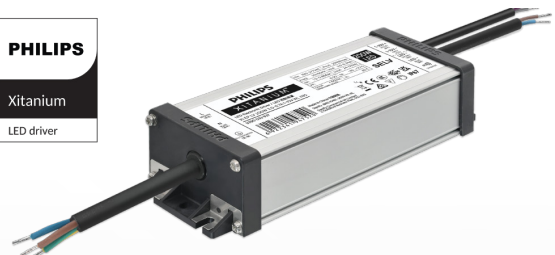
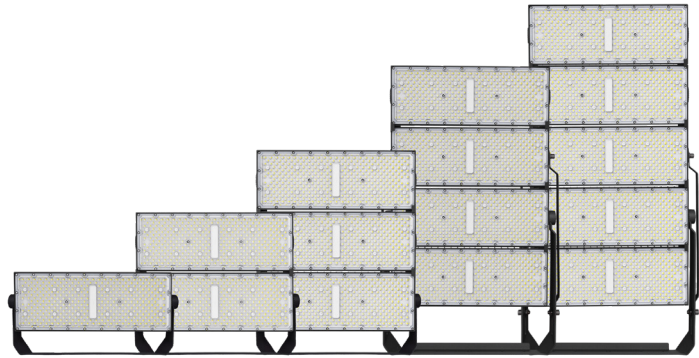


**Using PHILIPS LED Driver
Highly Reliable & Efficient**



<<Optional to Change 30° Beam Angle

MODEL	POWER (W)	CCT (K)	LUMEN (LM)	SIZE L x W x H (MM)	QUANTITY OF LED (PCS)	NET WEIGHT (KG)	PACKING (/CTN)
BSFLHD-1200/ULT/PH	200W	3000/4000/6500	30000	230 x 440 x 95	3030	2.8	1
BSFLHD-1400/ULT/PH	400W	3000/4000/6500	60000	390 x 440 x 95	6060	5.5	1
BSFLHD-1600/ULT/PH	600W	3000/4000/6500	90000	550 x 440 x 95	9090	7.9	1
BSFLHD-1800/ULT/PH	800W	3000/4000/6500	120000	710 x 440 x 95	12120	13.5	1
BSFLHD-1000/ULT/PH	1000W	3000/4000/6500	150000	870 x 440 x 95	15150	14.5	1

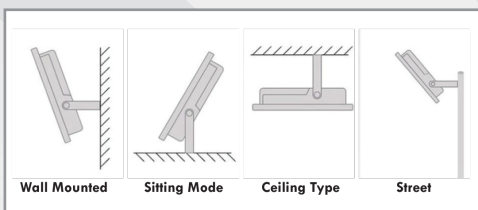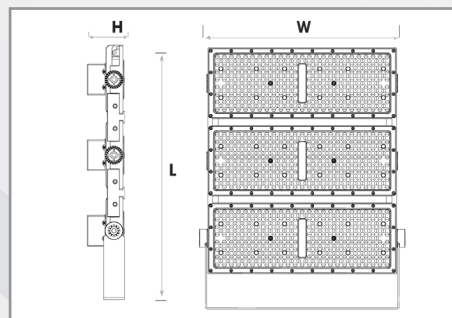

BODY TYPE (B) / (J)	SIZE L x W x H (mm)	NET WEIGHT (kg)
BASE	230 x 440 x 95	3.5
JOINT	150 x 400 x 95	2.74



**<<Optional to Add-On
Shade Cover>>**