



BOX UP KELUAR SIGN (BKR 330)

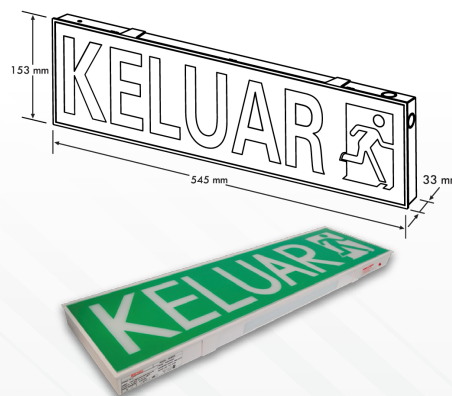

MODEL	BKR330
MODE OF OPERATION	Maintained
INPUT VOLTAGE	240V $\pm$ 10%, 50Hz
POWER CONSUMPTION	<4.7W
BATTERY TYPE	3.2V , 1500mAh Lithium ion Battery
LAMP USED	13 x 0.5W SMD LED
CHARGES	Constant Current
INDICATION	Red LED "On" Indicates Charging Equipped with Push Test-Switch to Simulate Power Failure
BACKUP DURATION	3 Hours
OPERATION TEMPERATURE	35°C
CONSTRUCTION	Thermoplastic in White ABS Polyester Base Polycarbonate Diffuser
CLASSIFICATION	Class II
MOUNTING TYPE	Surface Mounting
CERTIFIED COMPLIANCE	MS 983:2004 MS 619-2-22:2005 MS IEC 60598-1:2012 BOMBA APPROVED
CERTIFIED BY	SIRIM QAS International Sdn. Bhd Jabatan Bomba dan Penyelamat Malaysia
WARRANTY	5 years warrantly (Component) 1 year warranty (Battery)
DIMENSION	545(L)mm x 153 153(W)mm x 33(H)mm
WEIGHT	0.6kg
QUANTITY	10/CTN
OUTER BOX	562(L)mm x 200(W)mm x 305(H)mm
INNER BOX	552(L)mm x 158(W)mm x 33(H)mm

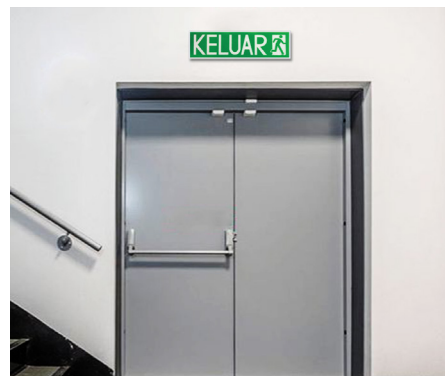

PICTOGRAM	SINGLE SIDED
	BKR330(KM)
	BKR330 (KR)
	BKR330 (KL)
	BKR330 (UA)
	BKR330 (LRA)



Please charge the battery for more than 12 hours before first discharge.

Note: Due to continuous development and improvement our company reserve the right to change specification without notice

